


TRADEFLEX

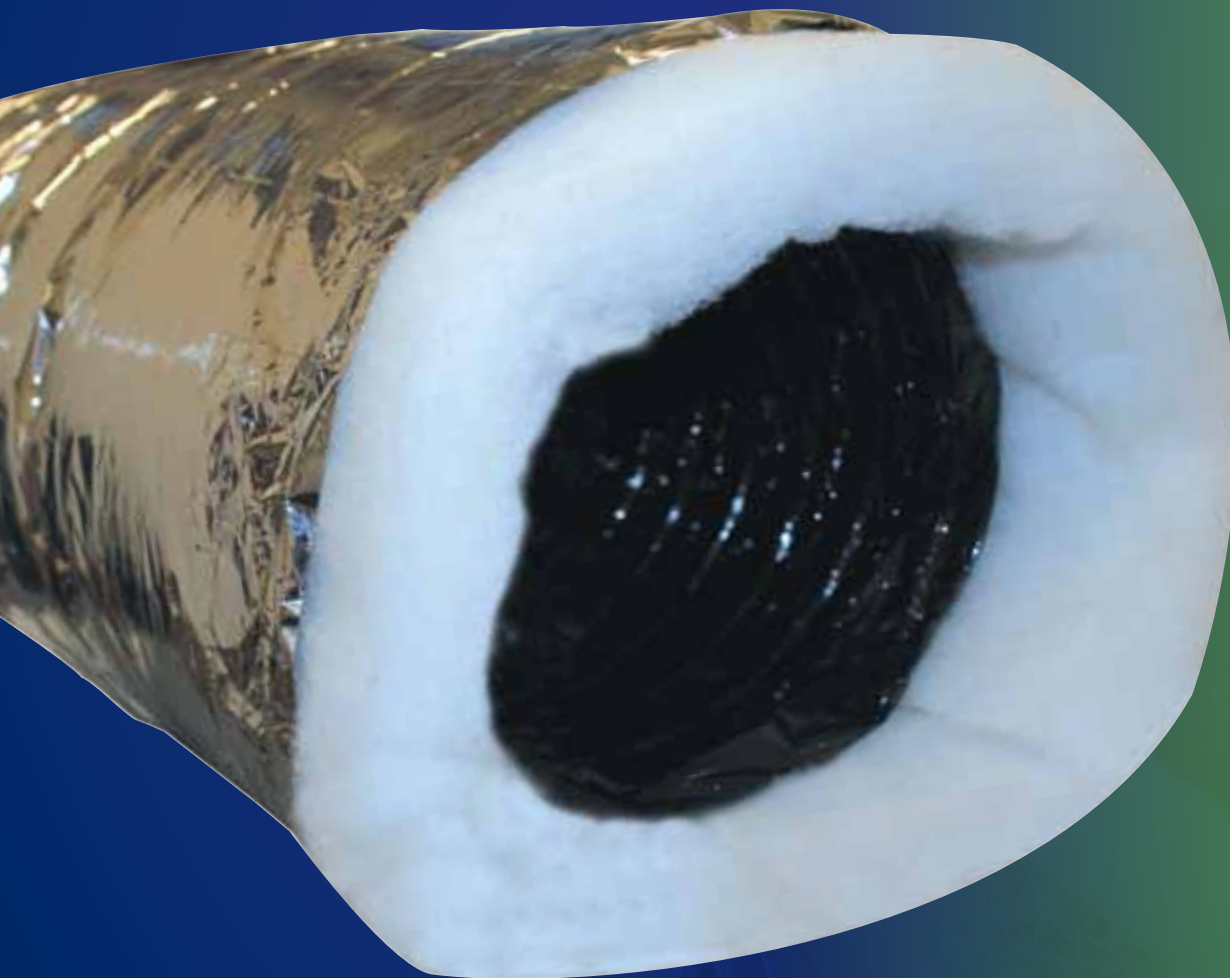

Flexible Duct the “Trade” uses

**TRADIES
CHOICE**

sales@tradieschoice.com.au
www.tradieschoice.com.au



TRADEFLEX

TRADEFLEX has been designed for the installer that has an application that requires less rigid flexible duct. Compliant to all requirements of Australian Standard AS 4254 and the Building Code of Australia. Available Insulated to R^T0.6 and R^T1.0. Operating temperature range -10°C to +80°C.



CONSTRUCTION

INNER CORE (Plain Nude)

TRADEFLEX plain nude is manufactured from two layers of high grade clear polyester bonded together with fire rated resin encapsulating copper coated spring steel wire and poly cotton reinforcing.

INSULATION

TRADEFLEX is thermally insulated with a polyester fibre blanket to achieve a nominal thermal rating of either R^T0.6, R^T1.0

OUTER JACKET

The outer jacket on TRADEFLEX is manufactured from one layer of clear and one layer of metallised PET material that is bonded together with fire resistant resin, encapsulating poly cotton spun over the material lap joins, for extra strength.

Compliance - Test Reports TRADEFLEX has been tested to, or complies with the following standards.	Tests Passed	Date Passed	Current
	Australian Standard (AS)-4254	2006	✓
	Australian Standard (AS)-1530 part 3	2006	✓
	Thermal Standard (AS)-4859.1	2009	✓

SIZES & TYPES OF TRADEFLEX

Metric Size (mm)	100	125	150	200	250	300	350	400	450	500	550	600
Imperial Size (mm)	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	22"	24"
6m Length / Plain Nude	•	•	•	•	•	•	•	•	•	•	•	•
6m Length / R ^T 0.6 Insulated	N/A	N/A	•	•	•	•	•	•	•	•	•	•
6m Length / R ^T 1.0 Insulated	N/A	N/A	•	•	•	•	•	•	•	•	N/A	N/A



sales@tradieschoice.com.au
www.tradieschoice.com.au
1300 663 130

